
ASSEMBLY INSTRUCTIONS MANUAL #60108 SPINNER RACK - 4 TIER WIRE




PAGE 1 OF 6

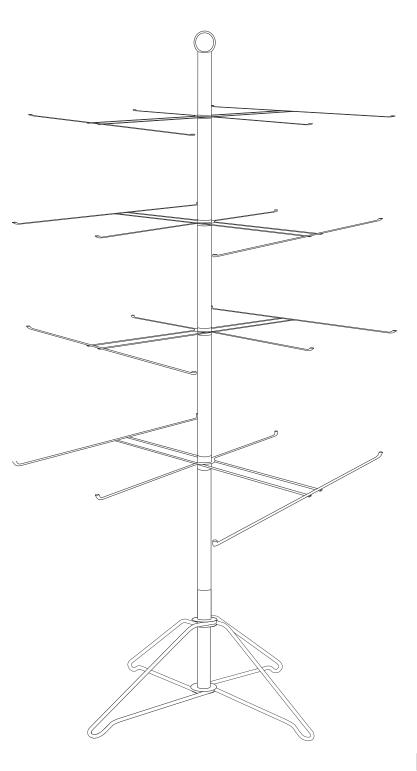


TOP TUBE - 1 SET OF 2 HOLES AND 2 SETS OF 3 HOLES (1 EACH)

BOTTOM TUBE - 2 SETS OF 4 HOLES (1 EACH)

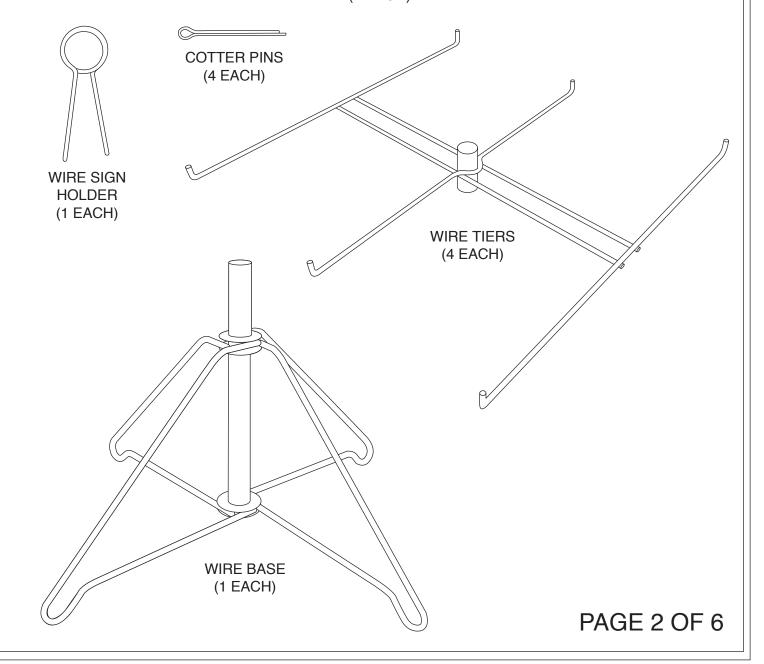

STEP 1. SNAP OPEN THE WIRE BASE BY SEPARATING THE FOUR WIRE LEGS. THE RESULT WILL BE A PYRAMID SHAPE COMPRISED OF (2) TRIANGLES JOINED AT THE CENTER.




BOTTOM TUBE


STEP 2. ATTACH THE BOTTOM TUBE TO THE BASE BY INSERTING THE TAPERED END OF THE TUBE INTO THE BASE. AFTER THE TUBE IS INSERTED, TWIST TUBE CLOCKWISE UNTIL IT LOCKS INTO THE BASE.

PAGE 3 OF 6

ASSEMBLY INSTRUCTIONS MANUAL #60108 SPINNER RACK - 4 TIER WIRE

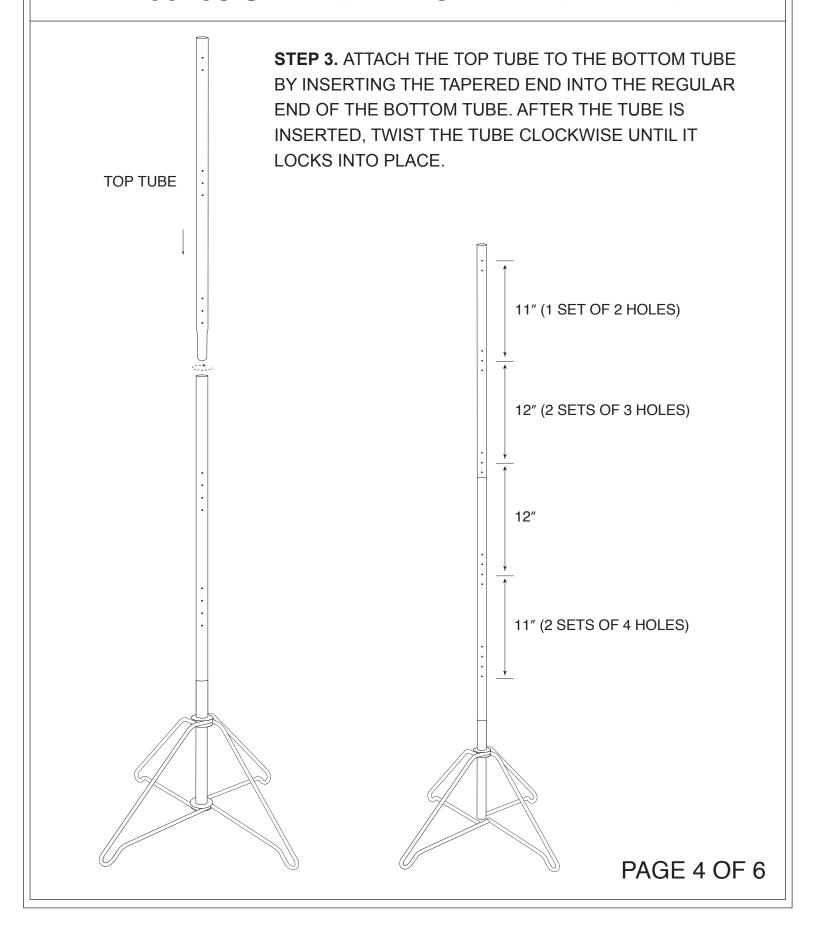

STEP 4. INSERT A COTTER PIN INTO ONE OF THE FOUR HOLES
LOCATED ON THE BOTTOM TUBE. AFTER THE COTTER PIN IS
INSERTED, BEND THE ENDS AWAY FROM EACH OTHER. THIS
WILL SECURE THE COTTER PIN INTO THE HOLE SO IT WILL NOT
FALL OUT. (SEE INSERT)
PLIERS ARE RECOMMENDED TO BEND THE WIRE.

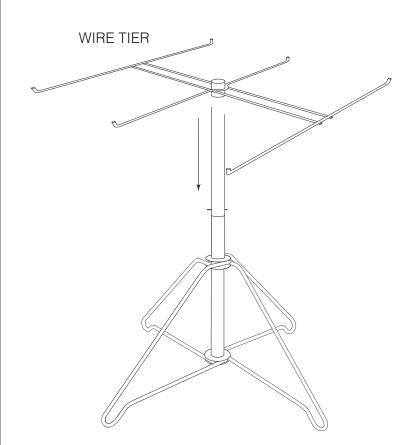

STEP 5. PLACE THE 1ST WIRE TIER ONTO THE TUBE AND LET IT REST ON THE COTTER PIN.

LOCATE THE NEXT SET OF HOLES, REPEAT STEPS 4 AND 5 FOR THE REMAINING WIRE TIERS TIERS.

PAGE 5 OF 6

STEP 6. ATTACH THE WIRE SIGN HOLDER TO THE TOP OF THE RACK.

