



PAGE 1 OF 6

### PARTS IN CARTON:

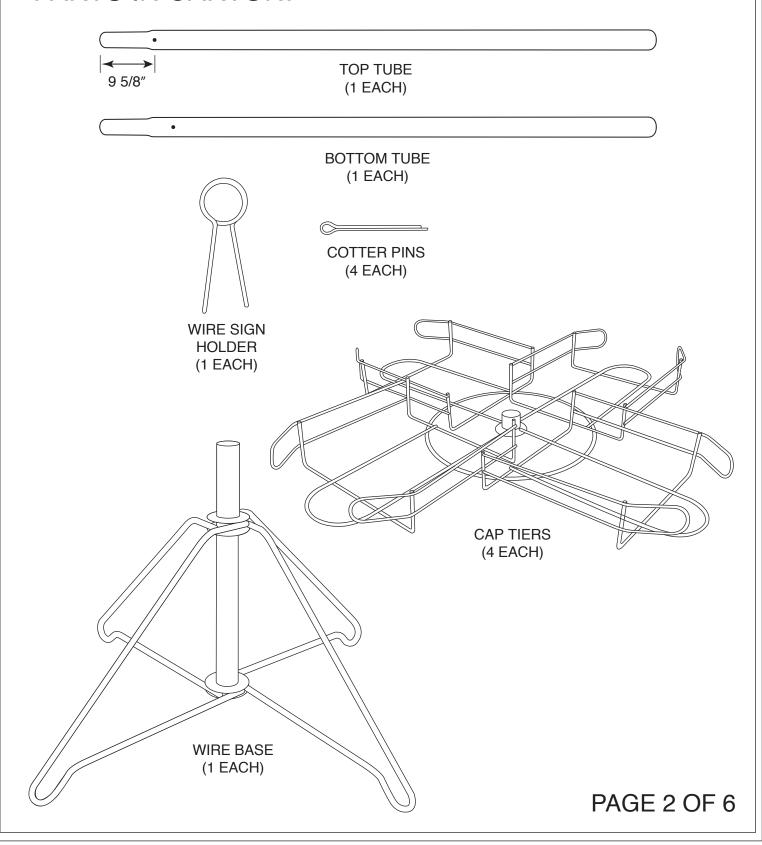

**STEP 1.** SNAP OPEN THE WIRE BASE BY SEPARATING THE FOUR WIRE LEGS. THE RESULT WILL BE A PYRAMID SHAPE COMPRISED OF (2) TRIANGLE JOINED AT THE CENTER.




STEP 2. LOCATE THE SMALL TUBE AT THE CENTER OF THE BASE. ATTACH THE BOTTOM TUBE TO THE BASE BY INSERTING THE TAPERED END OF THE TUBE INTO THE BASE. AFTER THE TUBE IS INSERTED, TWIST CLOCKWISE UNTIL IT LOCKS INTO THE BASE.

PAGE 3 OF 6


STEP 3. ATTACH THE TOP TUBE TO THE BOTTOM TUBE BY INSERTING THE TAPERED END INTO THE REGULAR END OF THE BOTTOM TUBE. AFTER THE TUBE IS INSERTED, TWIST THE TUBE CLOCKWISE UNTIL IT LOCKS INTO PLACE.


**TOP TUBE** 

STEP 3. ATTACH THE TOP TUBE TO THE BOTTOM TUBE BY INSERTING THE TAPERED END INTO THE REGULAR END OF THE BOTTOM TUBE. AFTER THE TUBE IS INSERTED, TWIST THE TUBE CLOCKWISE UNTIL IT LOCKS INTO PLACE.

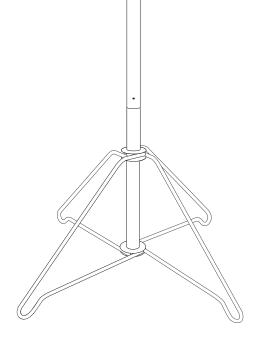


STEP 4. LOCATE THE LOWEST HOLE IN THE BOTTOM TUBE. INSERT A COTTER PIN INTO THE HOLE. AFTER THE COTTER PIN IS INSERTED ALL THE WAY, BEND THE ENDS AWAY FROM EACH OTHER. THIS WILL SECURE THE COTTER PIN INTO THE HOLE SO IT WILL NOT FALL OUT. (SEE INSERT)



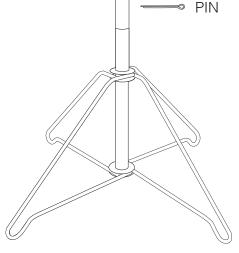

COTTER

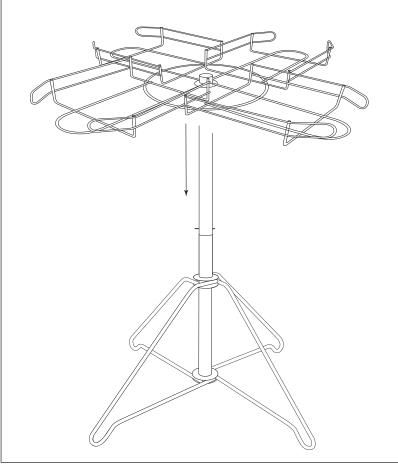


**STEP 5.** PLACE THE 1ST CAP TIER ONTO THE TUBE AND LET IT REST ON THE COTTER PIN.

LOCATE THE NEXT HOLE ABOVE THE 1ST CAP TIER, REPEAT STEPS 4 AND 5 FOR THE REMAINING CAP TIERS.

PAGE 5 OF 6

**STEP 6.** ATTACH THE WIRE SIGN HOLDER TO THE TOP OF THE RACK.

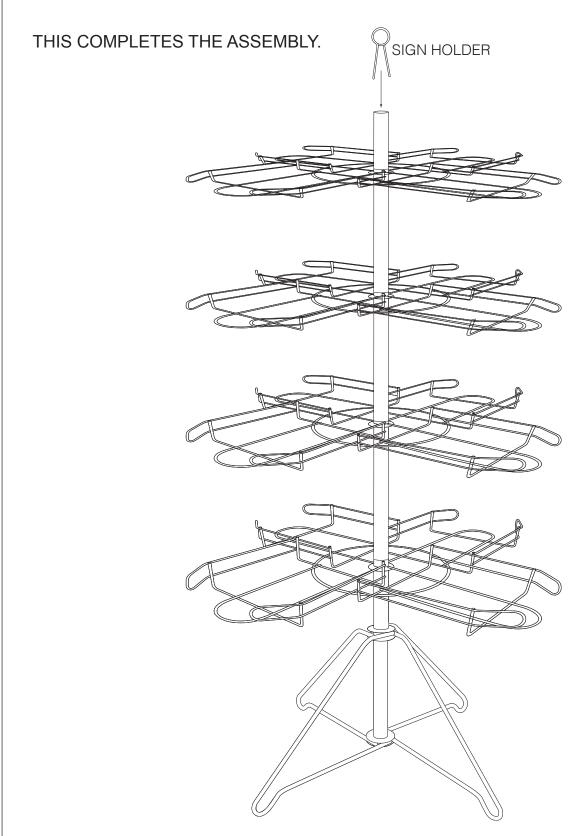

PAGE 6 OF 6