



STEP 1

INSERT ROUND TUBE EXTENSIONS INTO TO THE OPPOSITE HALF. INSERT BOLT #2 INTO EACH HOLE AND TIGHTEN.

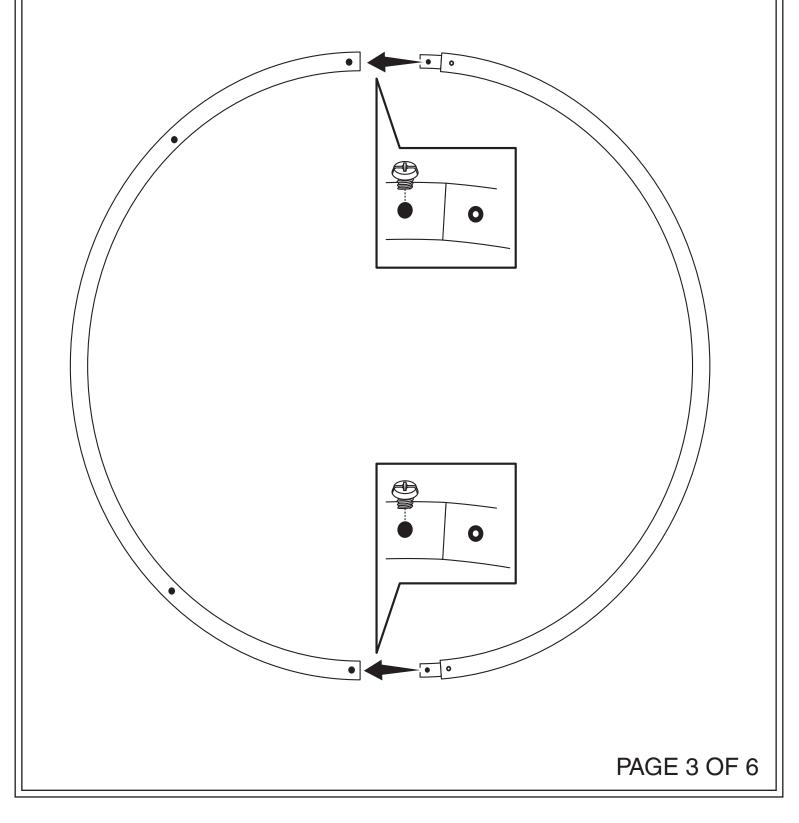


STEP 2

SET EACH RACK FRAME OPPOSITE TO EACH OTHER, CAREFULLY INSERT THE EXTENSION TO THE OPPOSITE TUBE. INSERT BOLT #1 INTO EACH HOLE AND TIGHTEN.

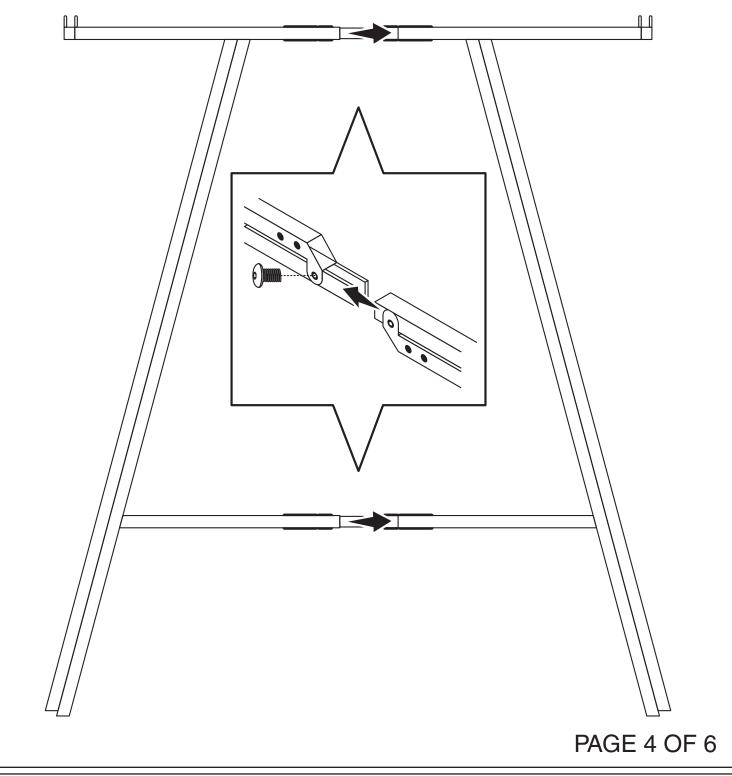


STEP 3

INSERT EACH RACK LEG INTO THE BOTTOM OF THE RACK ASSEMBLY, ENSURE THE PUSH BUTTONS FACE THE CORRESPONDING HOLES. ADJUST TO DESIRED HEIGHT.

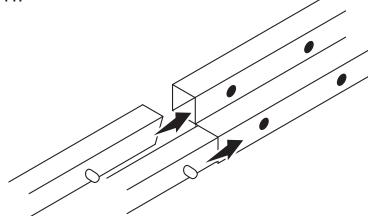

STEP 4

STAND RACK ASSEMBLY UP AND EXPAND.

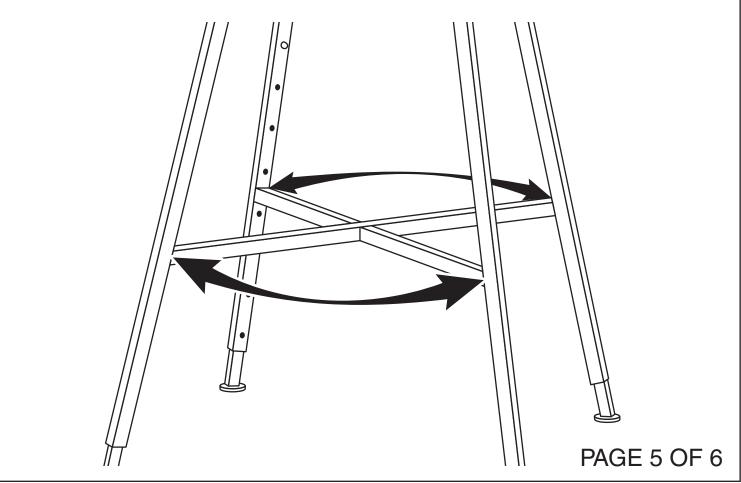

STEP 5

LOCATE THE HOLES ON BOTTOM OF THE ROUND TUBING, ALIGN WITH FRAME ASSEMBLY PEGS, SET INTO PLACE.

